

# 1-Cylinder Small Piston Pump

To the promotion of gaseous media at technology (A-2)

Made in Germany – ISO 9001 certified



# hyco®

more information: PB-2


[www.hyco.de](http://www.hyco.de)



Technology  
(A-2)



Technical Data:		KP25-H5-AW14	KP25-H6-AW14	KP25-H9-AW14	KP25-H5-AW26	KP25-H6-AW26	KP25-H9-AW26
Free flow	l/min	3,5	4	5,8	6,5	8	11
Final vacuum	mbar	120	128	80	120	128	80
Final pressure	(abs.)	4 bar	6 bar	6 bar	4 bar		
Pump heads		1					
Hose coupling, suction / pressure		G 1/8"					
Mains requirement - Frequencies		230V-50 Hz or 12VDC or 24VDC					
Motor power / r.p.m.		0,068 KW / 1400 min <sup>-1</sup>			0,09 KW / 2600 min <sup>-1</sup>		
Ex-Motor		not possible					
Noise level	dB(A)	53 to 57					
Permissible gas admission temp.	°C	+ 5 to + 45					
Permissible ambient temperature	°C	+ 5 to + 45					
Dimensions mm	L x W x H	137 x 80 x 140					
Weight ca.	kg	1,8					
Impermeable to gas		not possible					

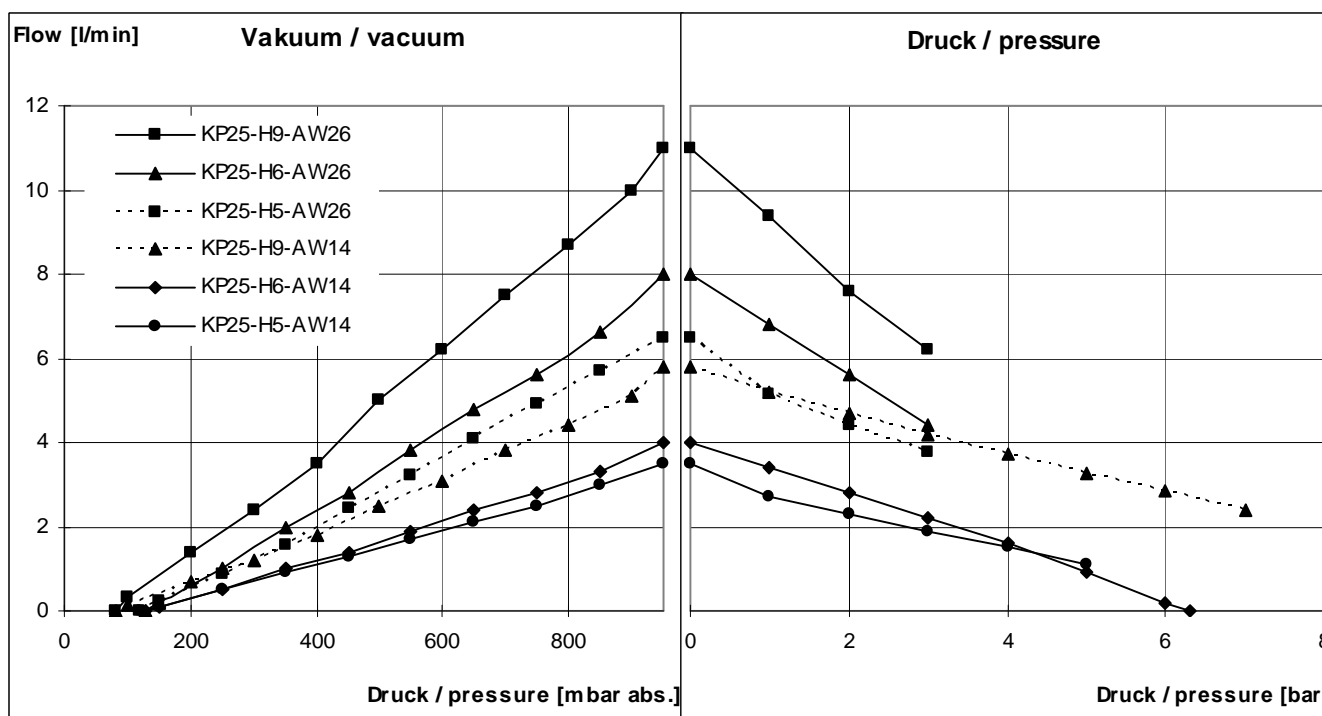

hyco Vakuumtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailing (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901

Internet: [www.hyco.de](http://www.hyco.de) • eMail: [info@hyco.de](mailto:info@hyco.de)