

2-Cylinder Small Piston Pump

To the promotion of gaseous media at technology (A-1)

Made in Germany – ISO 9001 certified




hyco®

more information: PB-22


www.hyco.de



Technology (A-1)



Technical Data:	KL25.22	KL25.23	KL25.22	KL25.23	KL25.22	KL25.23	KL25.22	KL25.23
	-H3,5-AW14	-H3,5-AW14	-H6,4-AW14	-H6,4-AW14	-H3,5-AW26	-H3,5-AW26	-H6,4-AW26	-H6,4-AW26
Free flow l/min	5	3	8,5	4,3	9	4,5	18	8
Final vacuum mbar	320	120	140	27	318	120	130	27
Final pressure (abs.)	4 bar	8 bar	5 bar	6 bar	4 bar			
Pump heads	2							
Hose coupling, suction / pressure	G 1/8"							
Mains requirement - Frequencies	230V-50 Hz or 12VDC or 24VDC							
Motor power / r.p.m.	0,068 KW / 1400 min ⁻¹				0,068 KW / 2600 min ⁻¹			
Ex-Motor	not possible							
Noise level dB(A)	50 to 53							
Permissible gas admission temp. °C	+ 5 to + 45							
Permissible ambient temperature °C	+ 5 to + 45							
Dimensions mm L x W x H	145 x 95 x 140							
Weight ca. kg	2,8							
Impermeable to gas	not possible							

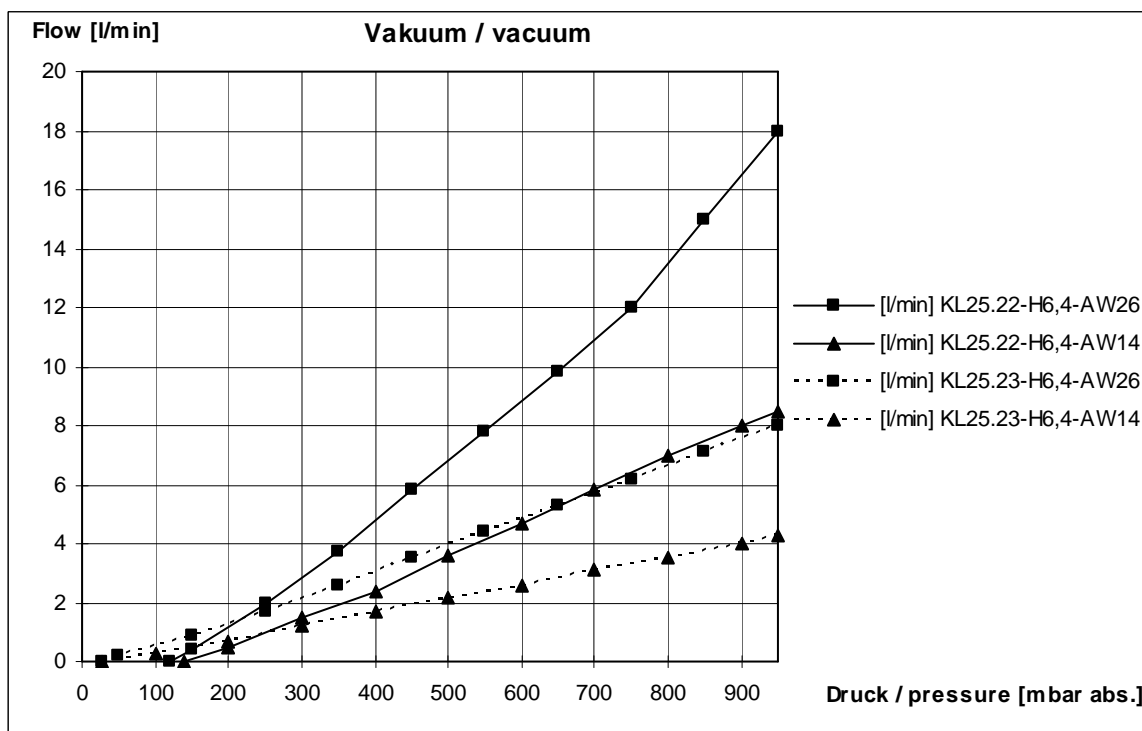

hyco Vakuuumtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailling (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901

Internet: www.hyco.de • eMail: info@hyco.de