

2-Cylinder Diaphragm Pump


To the promotion of gaseous media at technology (A-2)

Made in Germany – ISO 9001 certified




hyco®

more information: PB-23


www.hyco.de

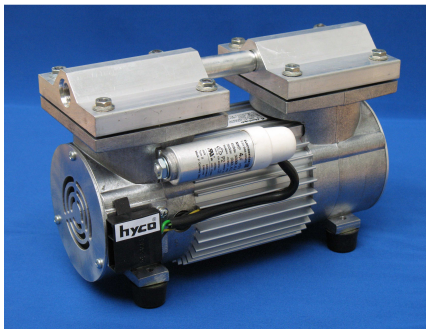

Technology (A-2)

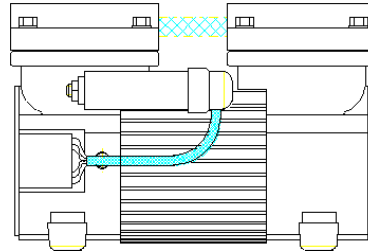

Technical Data:		MPZ 65.22	MPZ 65.23	MPZ 75.22	MPZ 75.23	MPZ 86.22	MPZ 86.23
Free flow	l/min	17	8,5	41	22,5	65	33
Final vacuum	mbar	120	32	100	11	85	10
Final pressure	(abs.)	3 bar		2 bar		1 bar	
Pump heads		2					
Hose coupling, suction / pressure		G 1/4"					
Mains requirement - Frequencies		230V-50 Hz or 115V-60 Hz					
Motor power / r.p.m.		0,09 KW / 1400 min ⁻¹					
Ex-Motor		not possible					
Noise level	dB(A)	49 to 53					
Permissible gas admission temp.	°C	+ 5 to + 45					
Permissible ambient temperature	°C	+ 5 to + 45					
Dimensions mm	L x W x H	234 x 131 x 159					
Weight ca.	kg	5,5					
Impermeable to gas		1 x 10 ⁻³ mbar x l/s (unexamined)					

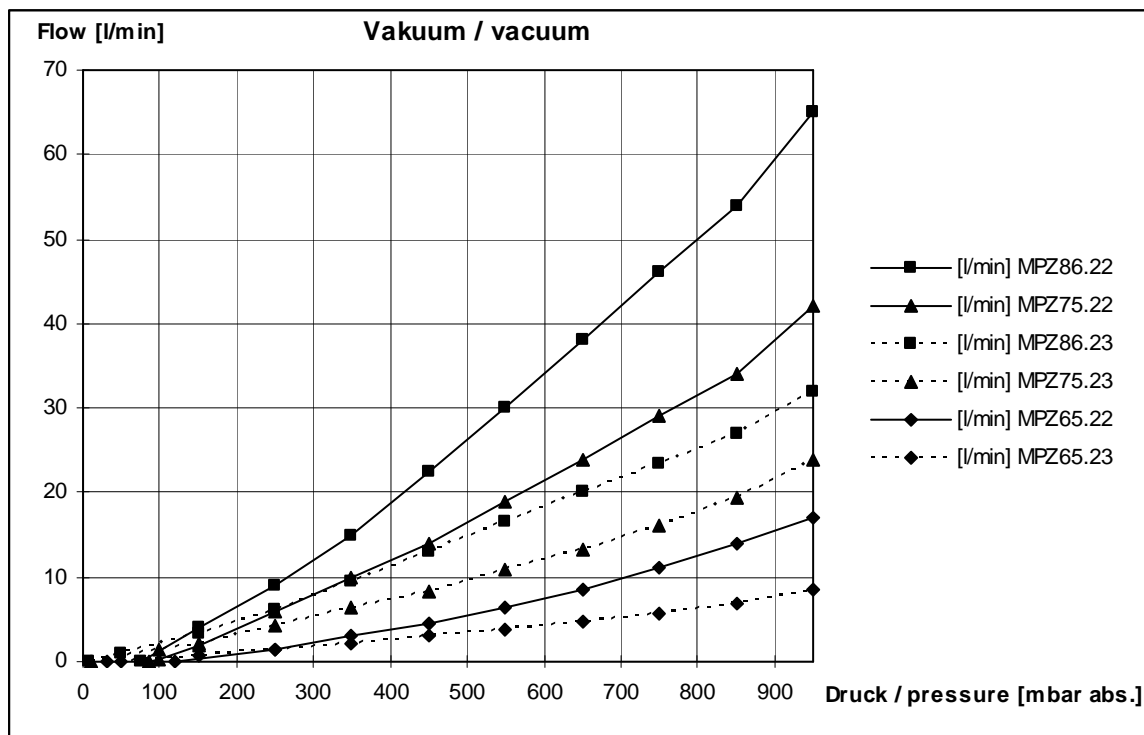

hyco Vakuumtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailing (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901

Internet: www.hyco.de • eMail: info@hyco.de