

# 1-Cylinder Diaphragm Pump


To the promotion of gaseous media at technology (A-2)

Made in Germany – ISO 9001 certified



# hyco®

more information: PB-3


[www.hyco.de](http://www.hyco.de)

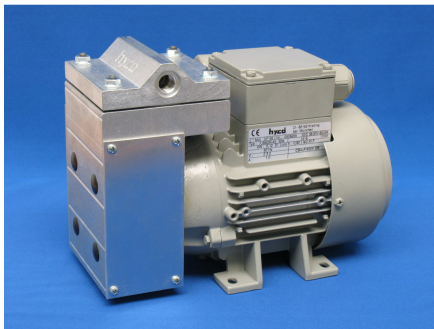

Technology (A-2)

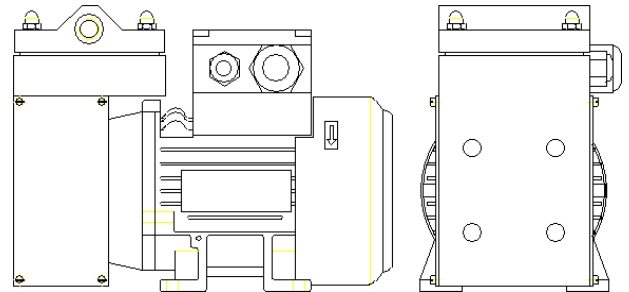

Technical Data:		MP65-W14	MP75-H5-W14	MP75-W14	MP86-H6-W14	MP86-W14
Free flow	l/min	8,4	15,2	23,5	25,5	33
Final vacuum	mbar	150	120	95	125	85
Final pressure	(abs.)	4 bar	3 bar		2 bar	
Pump heads		1				
Hose coupling, suction / pressure		G 1/4"				
Mains requirement - Frequencies		230V-50 Hz or 230/400V-50Hz or 12VDC or 24VDC				
Motor power / r.p.m.		0,12 KW / 1400 min <sup>-1</sup>				
Ex-Motor		upon request				
Noise level	dB(A)	57 to 59				
Permissible gas admission temp.	°C	+ 5 to + 45				
Permissible ambient temperature	°C	+ 5 to + 45				
Dimensions mm	L x W x H	239,5 x 120 x 179,5				
Weight ca.	kg	4,5				
Impermeable to gas		1 x 10 <sup>-3</sup> mbar x l/s (unexamined)				

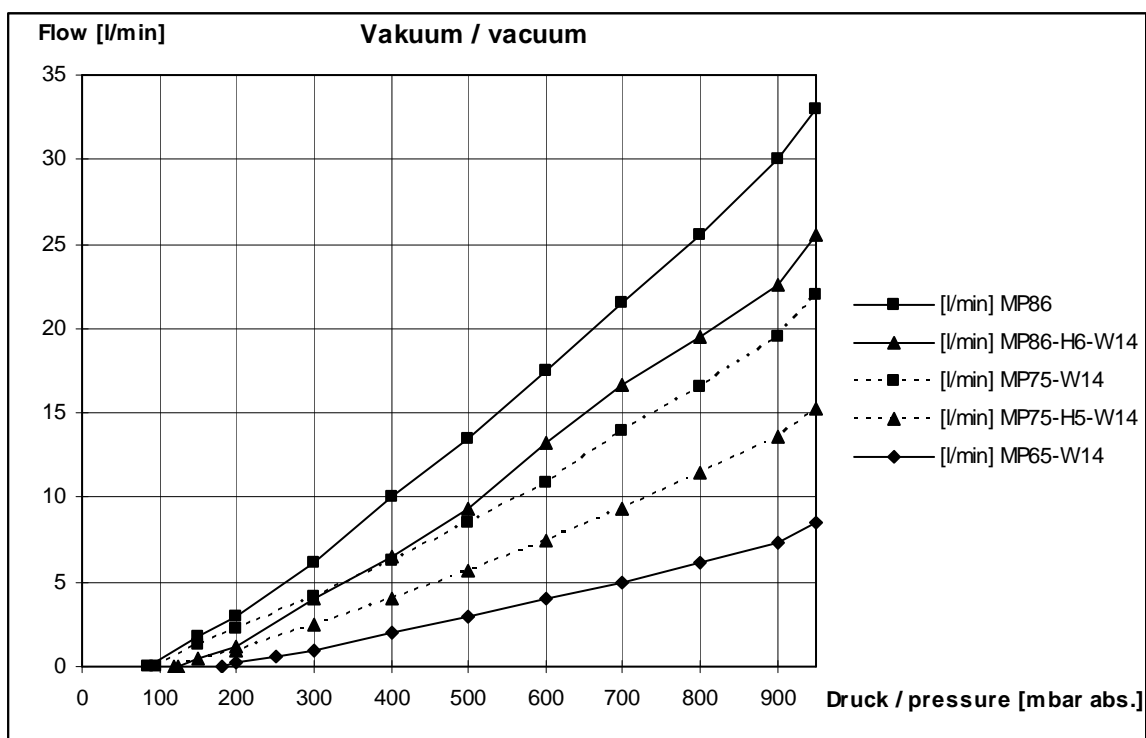

**hyco Vakuumtechnik GmbH**

Konrad-Zuse-Bogen 1 • D-82152 Krailing (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901

Internet: [www.hyco.de](http://www.hyco.de) • eMail: [info@hyco.de](mailto:info@hyco.de)