

# 4-Cylinder Diaphragm Pump


To the promotion of gaseous media at technology (A-2)

# hyco®




Made in Germany – ISO 9001 certified

more information: PB-34


[www.hyco.de](http://www.hyco.de)

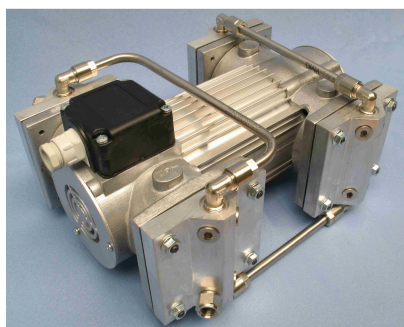

Technology (A-2)



Technical Data:	MMPZ	MMPZ	MMPZ	MMPZ	MMPZ	MMPZ
	75.45	75.46	75.48	86.45	86.46	86.48
Free flow l/min	80	47	37	115	69,5	55
Final vacuum mbar	90	20	12	85	12	7
Final pressure (abs.)	2 bar			1 bar		
Pump heads	4					
Hose coupling, suction / pressure	G 1/4"					
Mains requirement - Frequencies	230/400V-50Hz					
Motor power / r.p.m.	0,12 KW / 1400 min <sup>-1</sup>					
Ex-Motor	not possible					
Noise level dB(A)	57 to 59					
Permissible gas admission temp. °C	+ 5 to + 45					
Permissible ambient temperature °C	+ 5 to + 45					
Dimensions mm L x W x H	277 x 217 x 160					
Weight ca. kg	8,2					
Impermeable to gas	1 x 10 <sup>-3</sup> mbar x l/s (unexamined)					

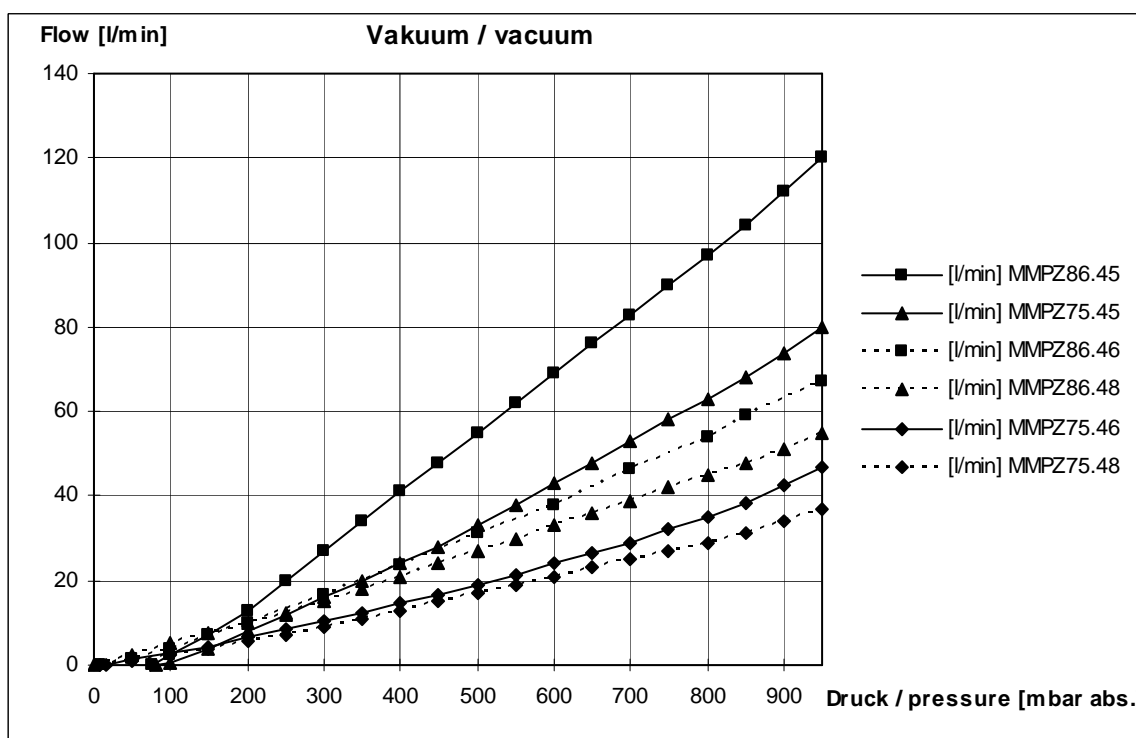

hyco Vakuumtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailing (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901

Internet: [www.hyco.de](http://www.hyco.de) • eMail: [info@hyco.de](mailto:info@hyco.de)