

4-Cylinder Diaphragm Pump

To the promotion of gaseous media at technology (A-2)




Made in Germany – ISO 9001 certified

hyco®


more information: PB-40
www.hyco.de



Technology (A-2)



Technical Data:	MPRZ 75.45	MPRZ 75.46	MPRZ 75.48	MPRZ 75.49
Free flow l/min	79	44	41,5	24,5
Final vacuum mbar	100	11	2	1
Final pressure (abs.)	1 bar			
Pump heads	4			
Hose coupling, suction / pressure	G 1/4"			
Mains requirement - Frequencies	230V-50 Hz or 115V-60 Hz			
Motor power / r.p.m.	0,08 KW / 1400 min ⁻¹			
Ex-Motor	not possible			
Noise level dB(A)	49 to 53			
Permissible gas admission temp. °C	+ 5 to + 45			
Permissible ambient temperature °C	+ 5 to + 45			
Dimensions mm L x W x H	303,5 x 165 x 159,5			
Weight ca. kg	9,5			
Impermeable to gas	1 x 10 ⁻³ mbar x l/s (unexamined)			

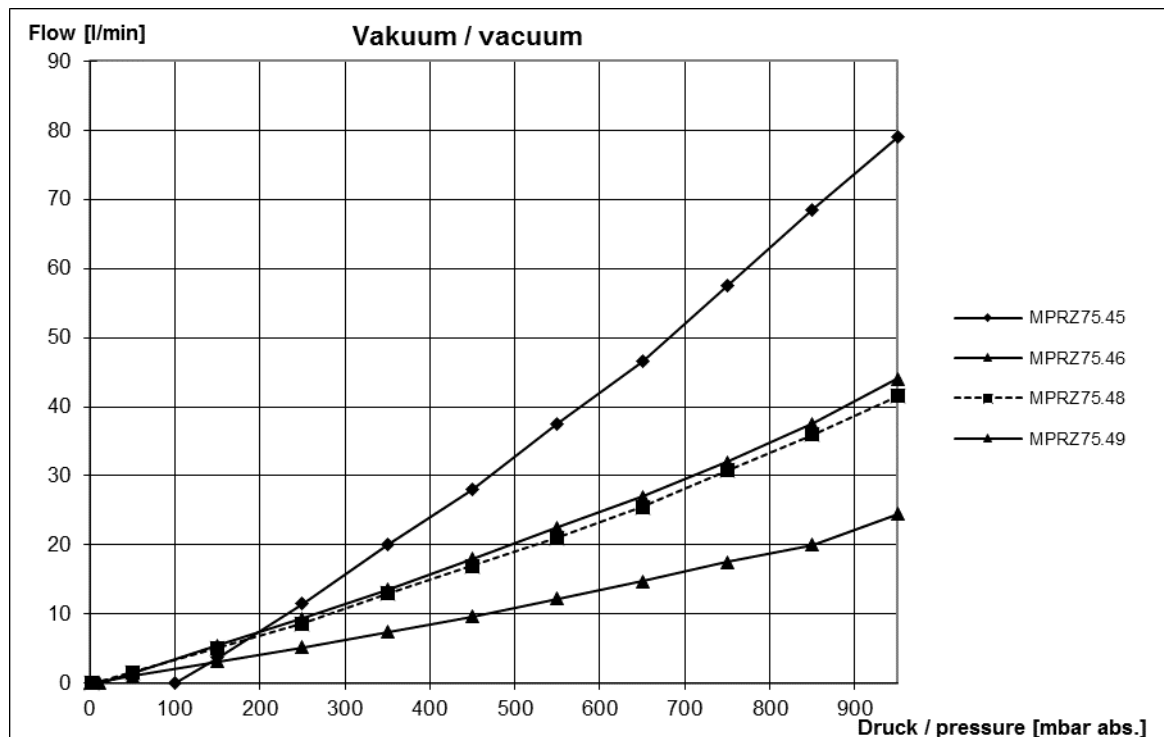

hyco Vakuümtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailling (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901
 Internet: www.hyco.de • eMail: info@hyco.de