

4-Cylinder Small Diaphragm Pump

To the promotion of gaseous media at technology (A-1)




Made in Germany – ISO 9001 certified




more information: PB-5
www.hyco.de



Technology (A-1)



Technical Data:		MLH48.45 -AW14	MLH48.46 -AW14	MLH48.48 -AW14	MLH48.45 -AW26	MLH48.46 -AW26	MLH48.48 -AW26
Free flow	l/min	25	13	11	37	26	23,5
Final vacuum	mbar	95	12	3	95	12	3
Final pressure	(abs.)	2 bar					
Pump heads		4					
Hose coupling, suction / pressure		G 1/8"					
Mains requirement - Frequencies		230V-50 Hz or 12VDC or 24VDC					
Motor power / r.p.m.		0,068 KW / 1400 min ⁻¹			0,09 KW / 2600 min ⁻¹		
Ex-Motor		not possible					
Noise level	dB(A)	49 to 53					
Permissible gas admission temp. °C		+ 5 to + 45					
Permissible ambient temperature °C		+ 5 to + 45					
Dimensions mm	L x W x H	140 x 140 x 145					
Weight ca.	kg	3,0					
Impermeable to gas		1 x 10 ⁻³ mbar x l/s (unexamined)					

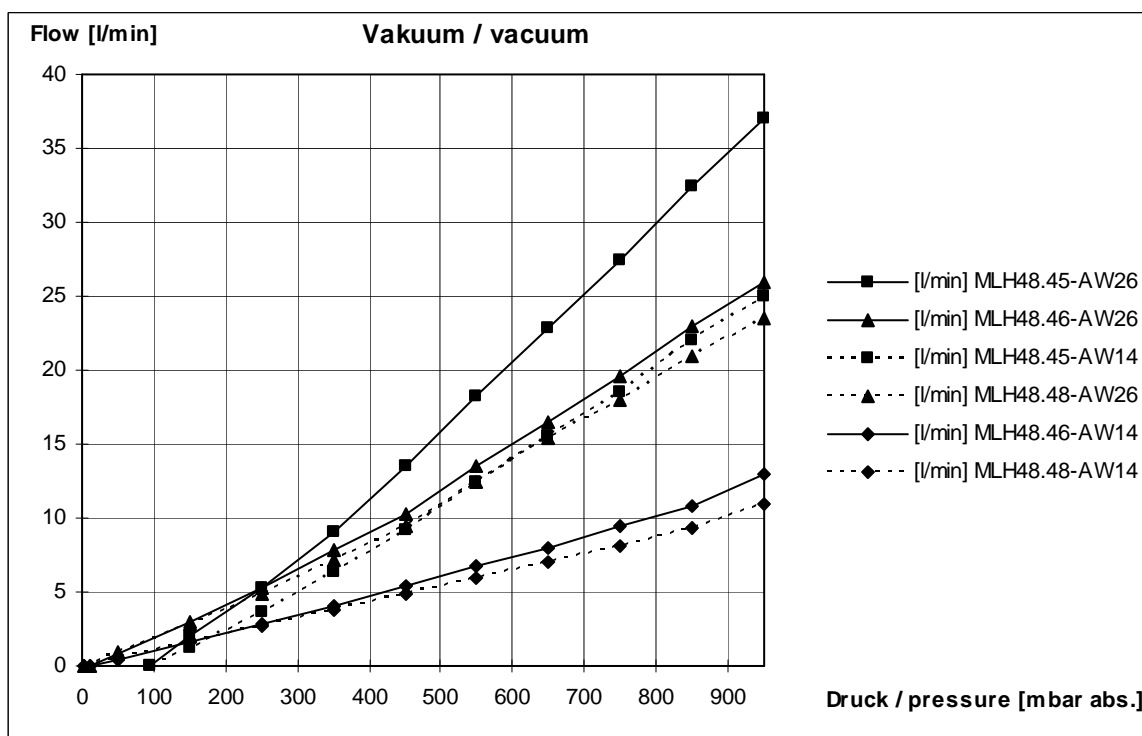

hyco Vakuumtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailing (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901
 Internet: www.hyco.de • eMail: info@hyco.de