

8-Cylinder Diaphragm Pump


To the promotion of gaseous media at technology (A-1)

Made in Germany – ISO 9001 certified



hyco®

more information: PB-9


www.hyco.de

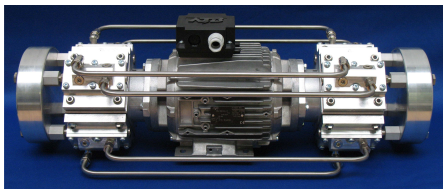

Technology (A-1)

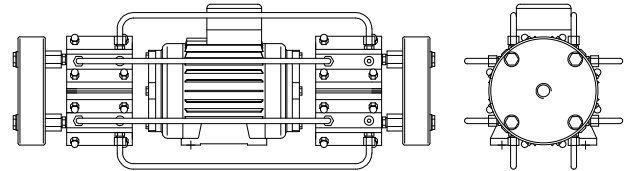

Technical Data:	ML75.85	ML75.86	ML75.88	ML86.85-ZV	ML86.86	ML86.88
Free flow l/min	155	97	77,5	220	138	114
Final vacuum mbar	90	12	2	75	9	3
Final pressure with KG-Gear (abs.)	3 bar			2 bar		
Final pressure with PR-Gear (abs.)	high pressure upon request					
Pump heads	8					
Hose coupling, suction / pressure	G 1/4" + G 1/2"					
Mains requirement - Frequencies	230/400V-50Hz					
Motor power / r.p.m.	0,45 - 0,9 KW / 1400 min ⁻¹					
Ex-Motor	not possible					
Noise level dB(A)	58 to 60					
Permissible gas admission temp. °C	+ 5 to + 45					
Permissible ambient temperature °C	+ 5 to + 45					
Dimensions mm L x W x H	616 x 253 x 265					
Weight ca. kg	24,5					
Impermeable to gas	1 x 10 ⁻³ mbar x l/s (unexamined)					

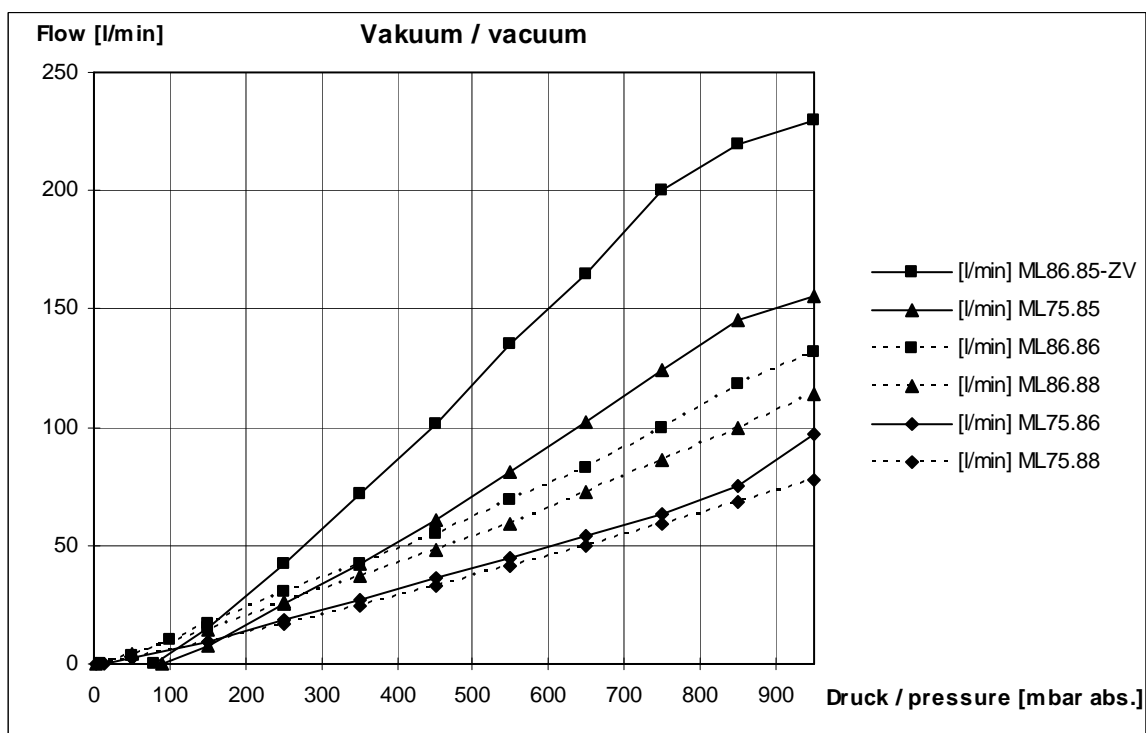

hyco Vakuumtechnik GmbH

Konrad-Zuse-Bogen 1 • D-82152 Krailing (Germany) • Tel.: +49 (0)89-85661900 • Fax: +49 (0)89-85661901

Internet: www.hyco.de • eMail: info@hyco.de